

# GO series

## CONDENSATE WATER PUMPS

Job Name \_\_\_\_\_

Purchaser \_\_\_\_\_

Submitted to \_\_\_\_\_

Submitted by \_\_\_\_\_

Unit Designation \_\_\_\_\_

Construction \_\_\_\_\_

Location \_\_\_\_\_

Engineer \_\_\_\_\_

Reference  Approval  Construction

Schedule # \_\_\_\_\_


Date \_\_\_\_\_

DESCRIPTION	GO 10 <i>up to 36,000 BTU 3 tons</i>	GO 16 <i>up to 54,000 BTU 5 tons</i>
Max flow rate	2.1 gal/h	4.3 gal/h
Flow rate at 3 ft	1.9 gal/h	3.8 gal/h
Flow rate at 10 ft	1.4 gal/h	2.8 gal/h
Max dry suction height	3.3 ft	3.3 ft
Max wet suction height	6.6 ft	6.6 ft
Max delivery height	28 ft	29.5 ft
Alarm contact	NC-120V/8A	NC-120V/8A
Pump dimensions	3.1" x 1.4" x 2.6"	3.1" x 1.4" x 2.6"
Sensor unit dimensions	3.2" x 1.6" x 1.6"	3.2" x 1.6" x 1.6"
Weight	9.9 oz	9.9 oz
Power supply	120v or 230v	120v or 230v
Noise level	22 dBA	23 dBA




### PACKAGE CONTENT

- GO pump body (1)
- Plug & Play detection unit with 5ft communication wire (2)
- Connection elbow (3)
- Ventilation tube (4)
- Check valve (5)
- Fixing screws and anchors (6)
- Double sided foam adhesive (7)

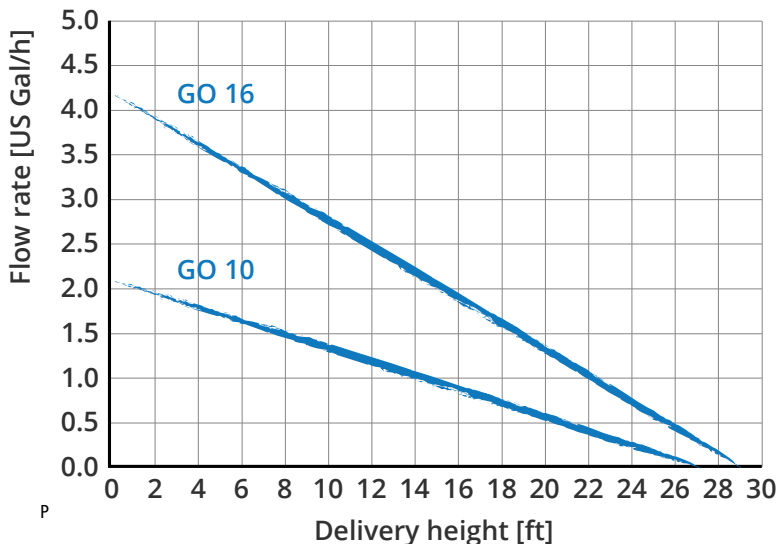

### INSTALLATION OPTIONS

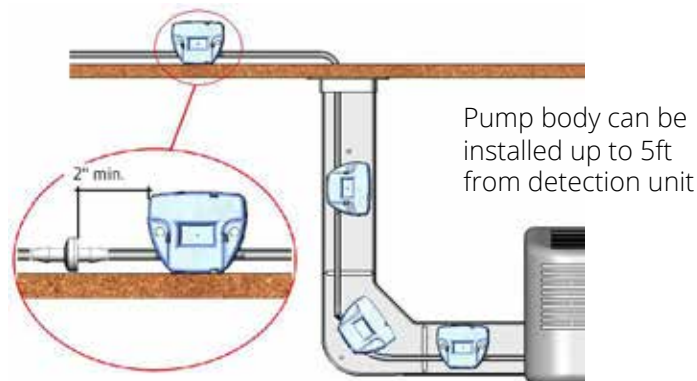

Products are subject to continuous improvements and HMAX reserves the right to modify product design specification & information in this data sheet without notice and without incurring any obligations.