

TATTOO

Condensate Removal System

- The Tattoo series is the **most silent** condensate removal system on the market today.
- Compact size compared to a tank pump
- Built-in check valve
- Thermal security of 230°F (110°C)
- 5ft communication wire
- **Normally Open/Normally Closed alarm 100V to 240V/8A**
- Delivered complete with mounting accessories - **ready to use**



SUITABILITY

- Split, multisplit and VRF/VRV systems
- Tattoo 10 is for air-conditioner systems up to 36,000 BTU 3 tons
- Tattoo 16 is for air-conditioner systems up to 54,000 BTU 5 tons
- High wall split systems, Ducted units, Floor standing, and Chassis units

CONTENTS

- Tattoo pump body (1)
- Mounting bracket for horizontal and vertical positioning (2)
- Plug & Play detection unit with 5ft communication wire (3)
- Connection elbow (4)
- Ventilation tube (5)
- Fixing screws and anchors (6)
- Double sided foam adhesive (7)




CONDENSATE PUMPS


TATTOO

Condensate Removal System


	TATTOO 10	TATTOO 16
Max flow rate	2.1 gal/h	4.3 gal/h
Flow rate at 3 ft	1.9 gal/h	3.8 gal/h
Flow rate at 10 ft	1.4 gal/h	2.8 gal/h
Max dry suction height	3.3 ft	3.3 ft
Max wet suction height	6.6 ft	6.6 ft
Max delivery height	28 ft	29.5 ft
Alarm contact	NO/NC-120v/8A	NO/NC-120v/8A
Pump dimensions	5.9" x 2.2" x 1.1"	5.9" x 2.2" x 1.1"
Sensor unit dimensions	3.2" x 1.6" x 1.6"	3.2" x 1.6" x 1.6"
Weight	15.5 oz	15.5 oz
Power supply	120v or 230v	120v or 230v
Noise level	<19 dBA	22 dBA

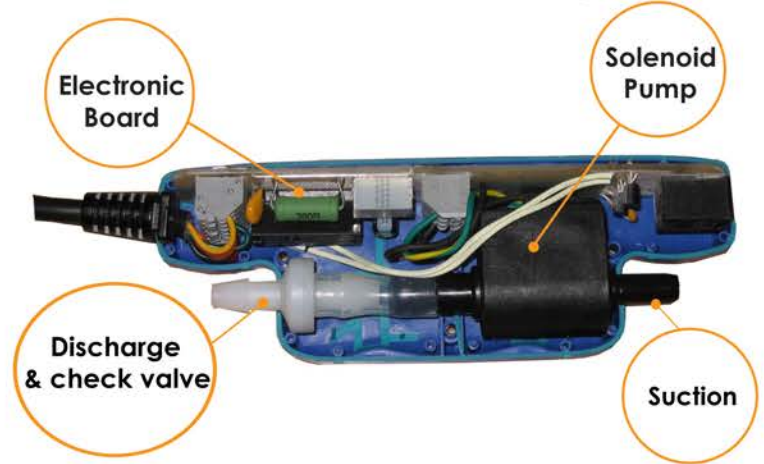


FLOW RATE

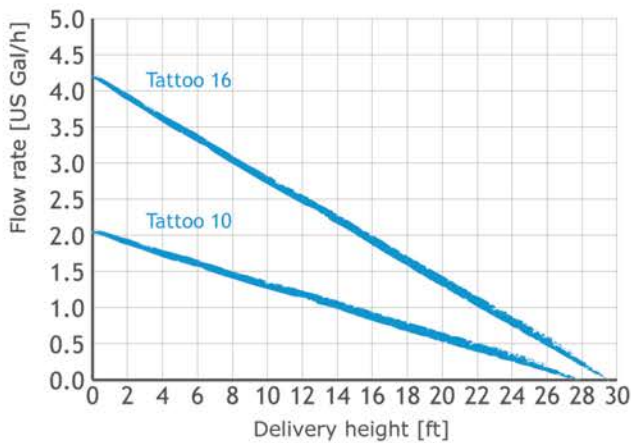

INSTALLATION OPTIONS

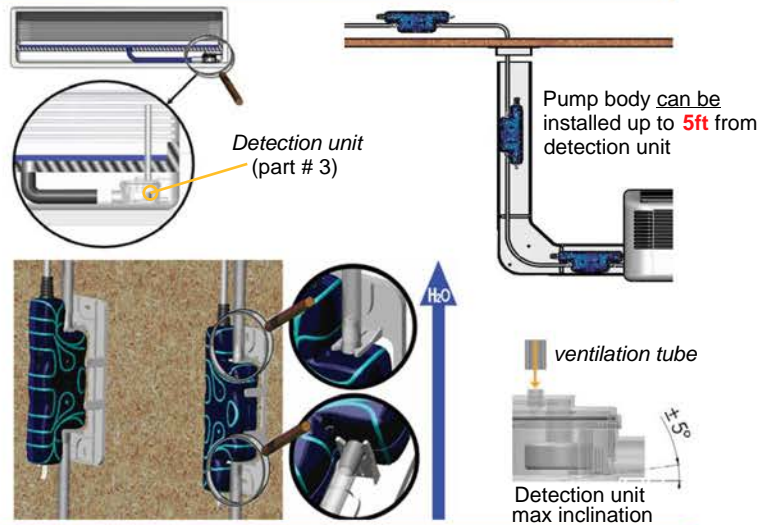

WIRING - RESIDENTIAL

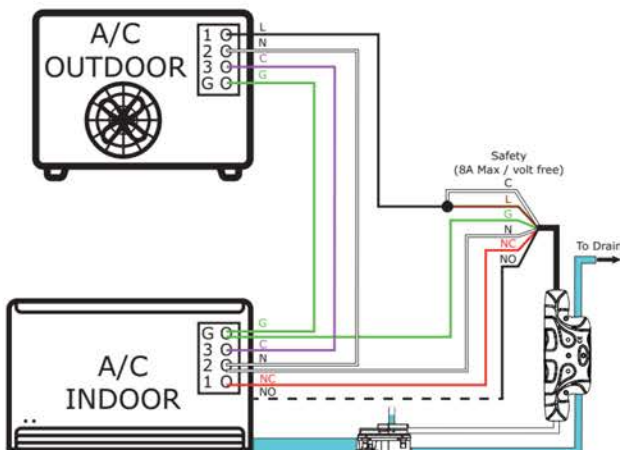

WIRING - COMMERCIAL

